

FIG. 1
radio receiver 10

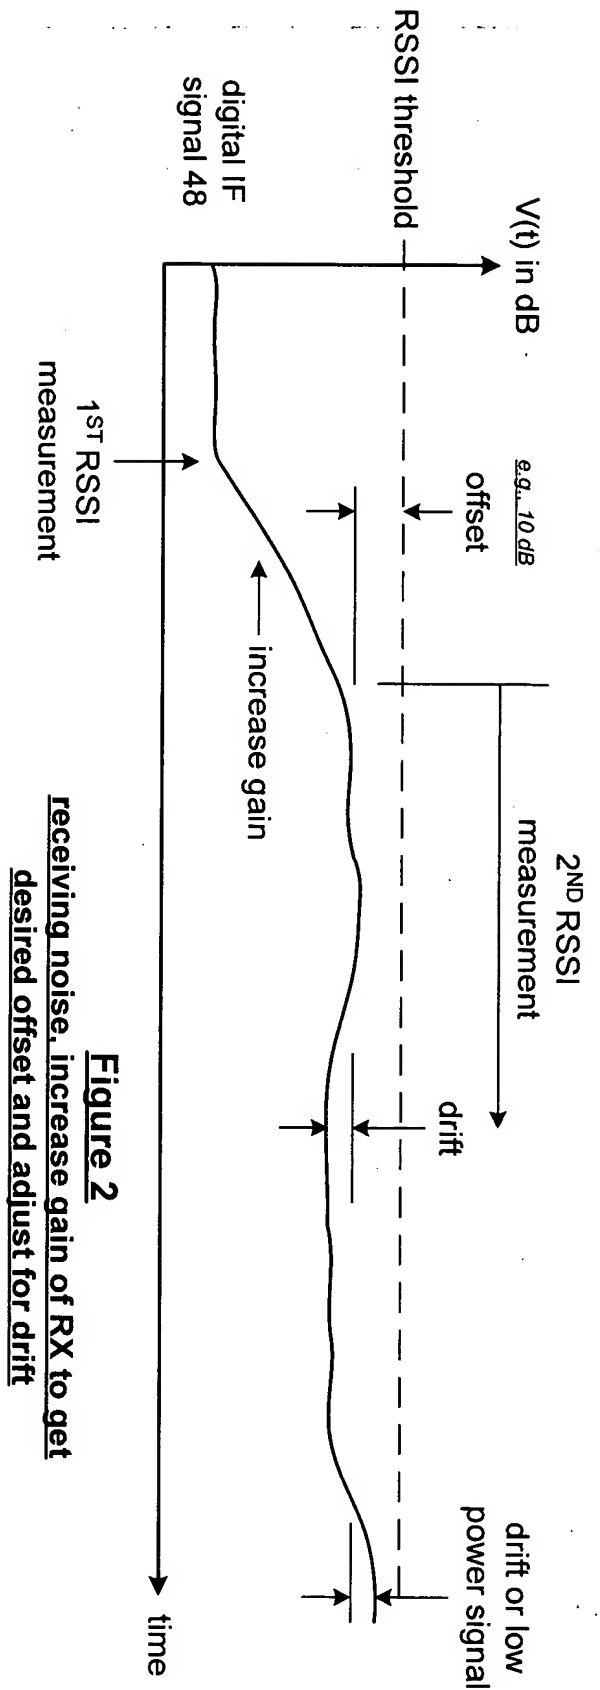


Figure 2
receiving noise. increase gain of RX to get
desired offset and adjust for drift

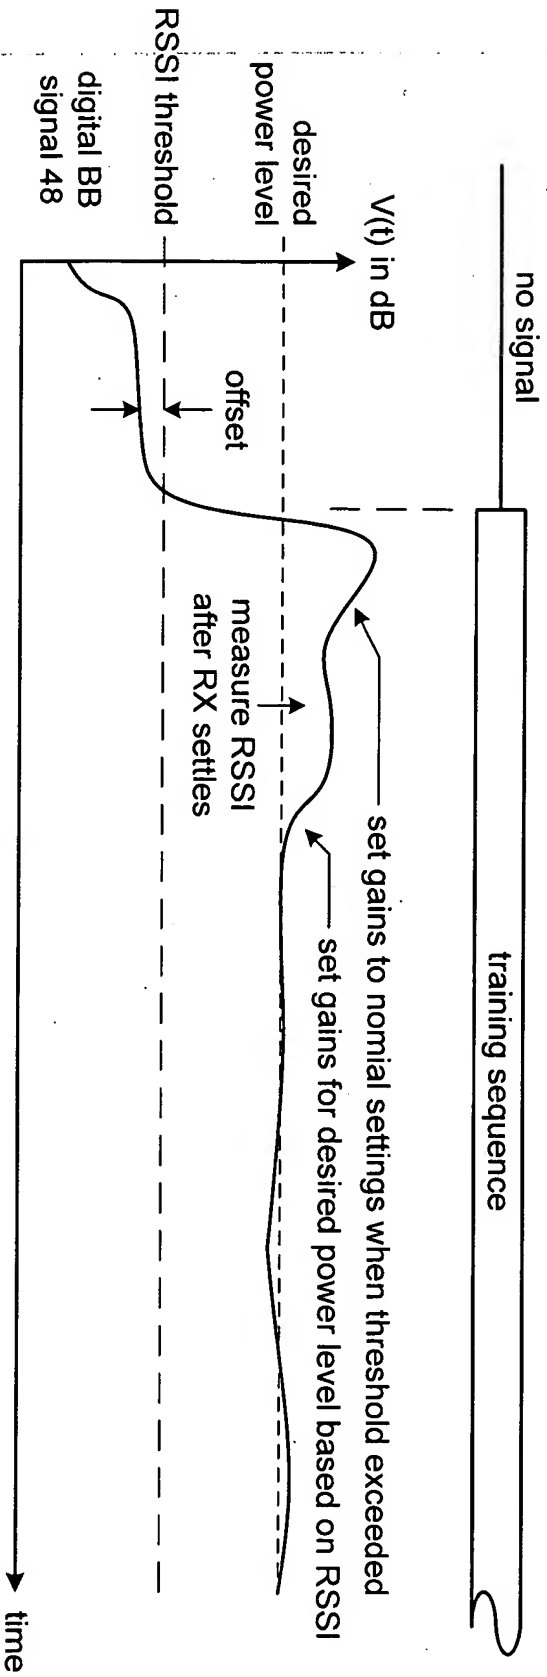


Figure 3

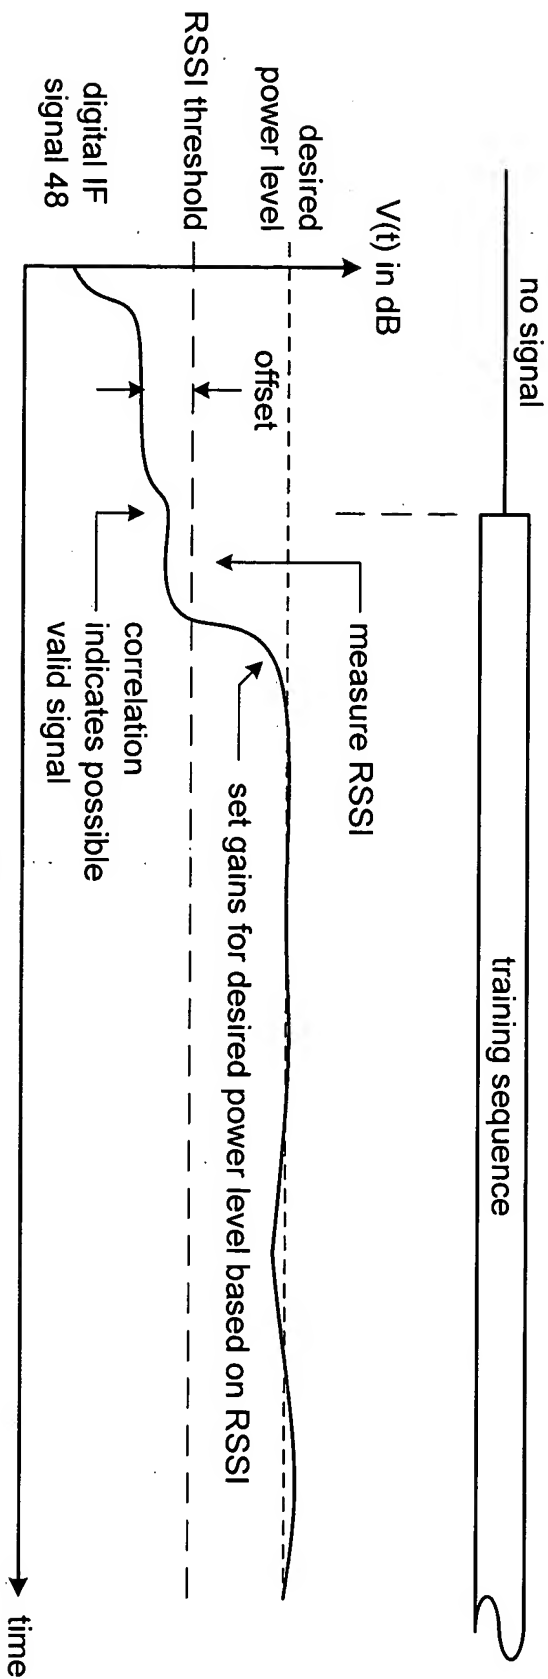


Figure 4

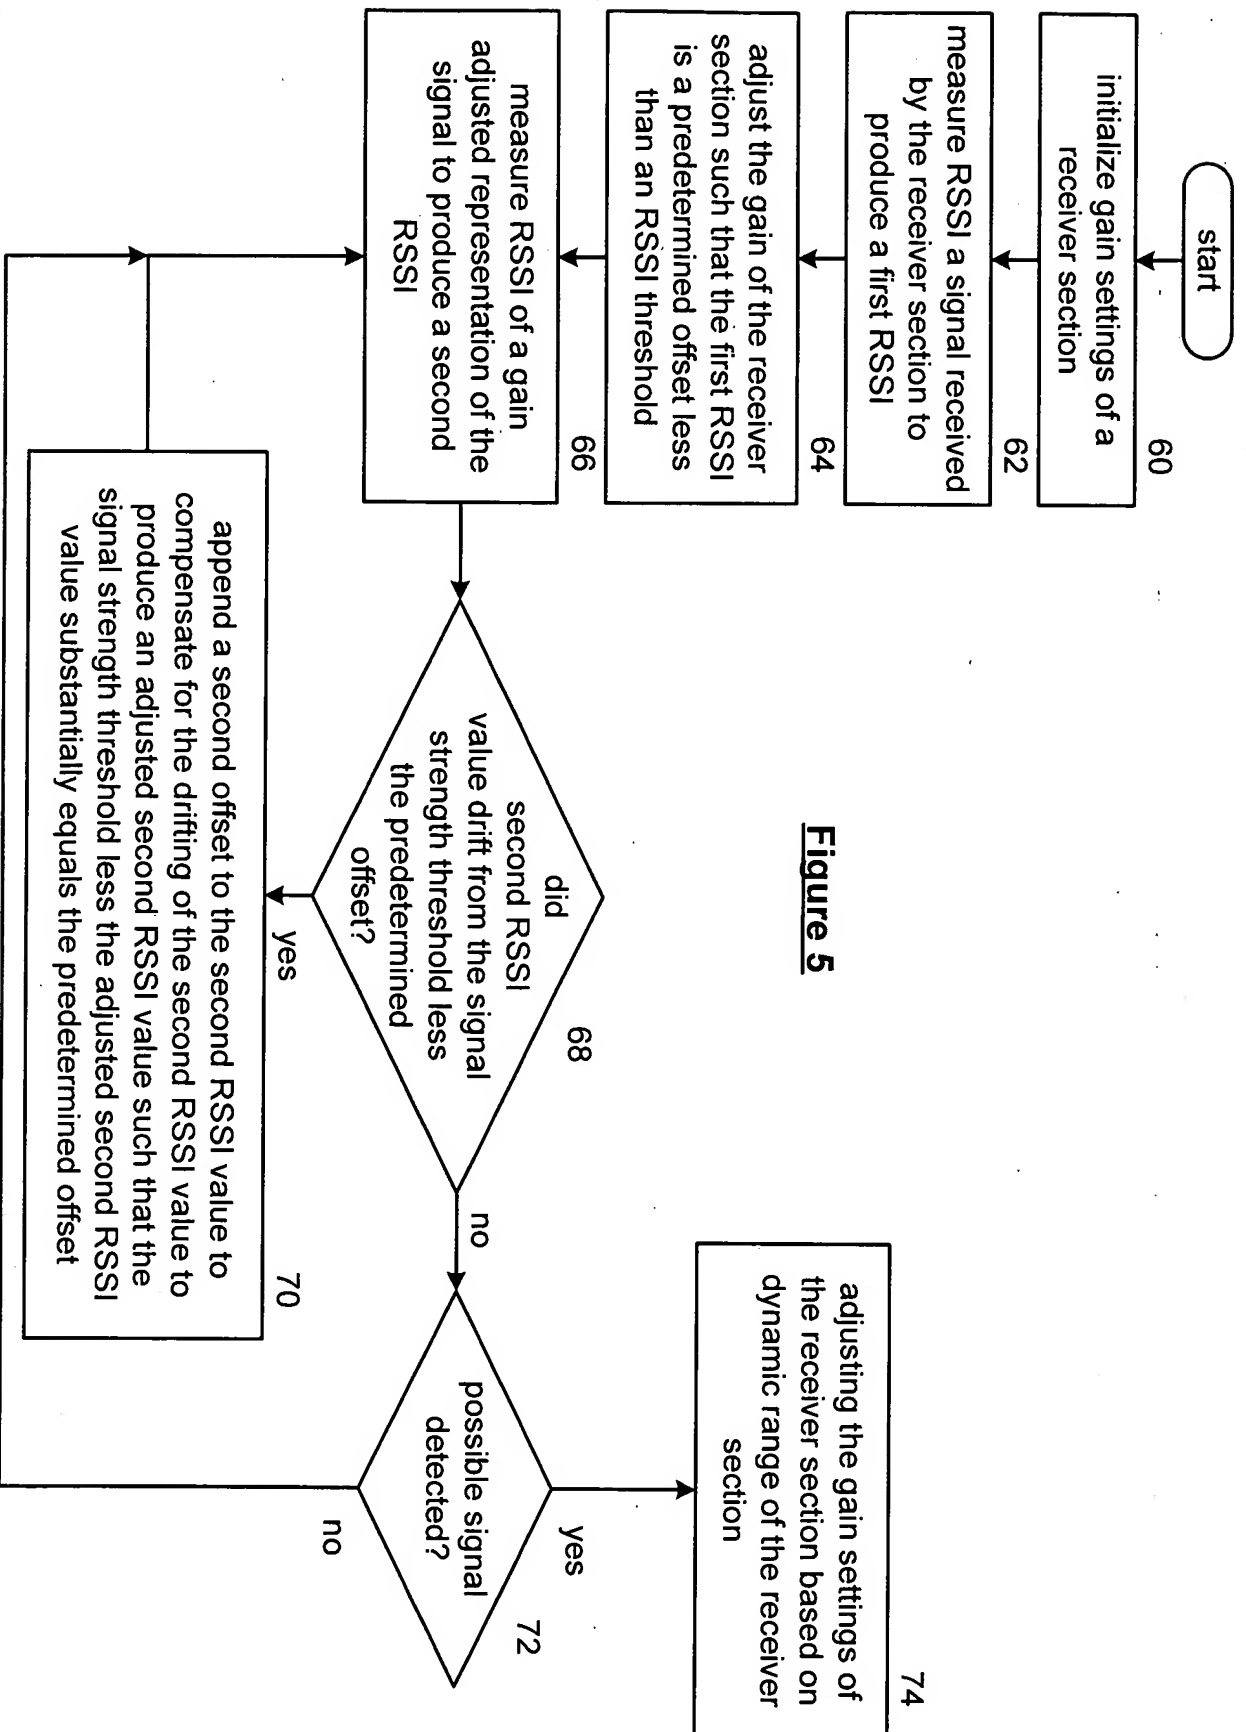


Figure 5

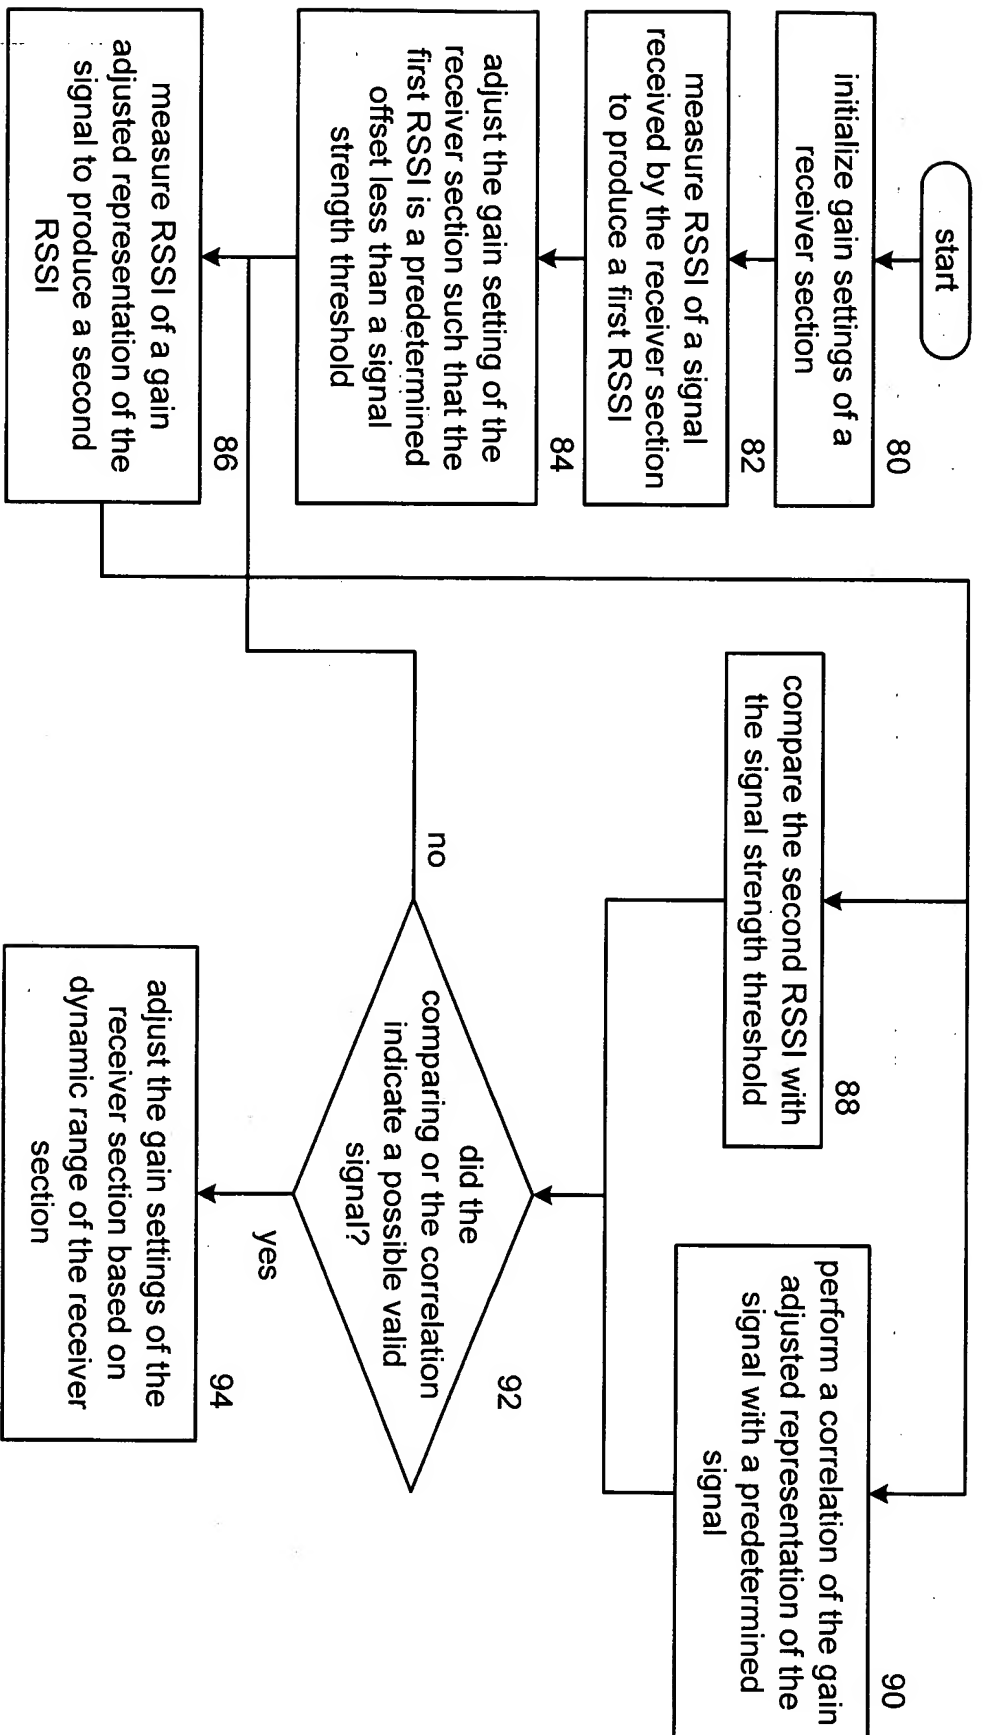


Figure 6

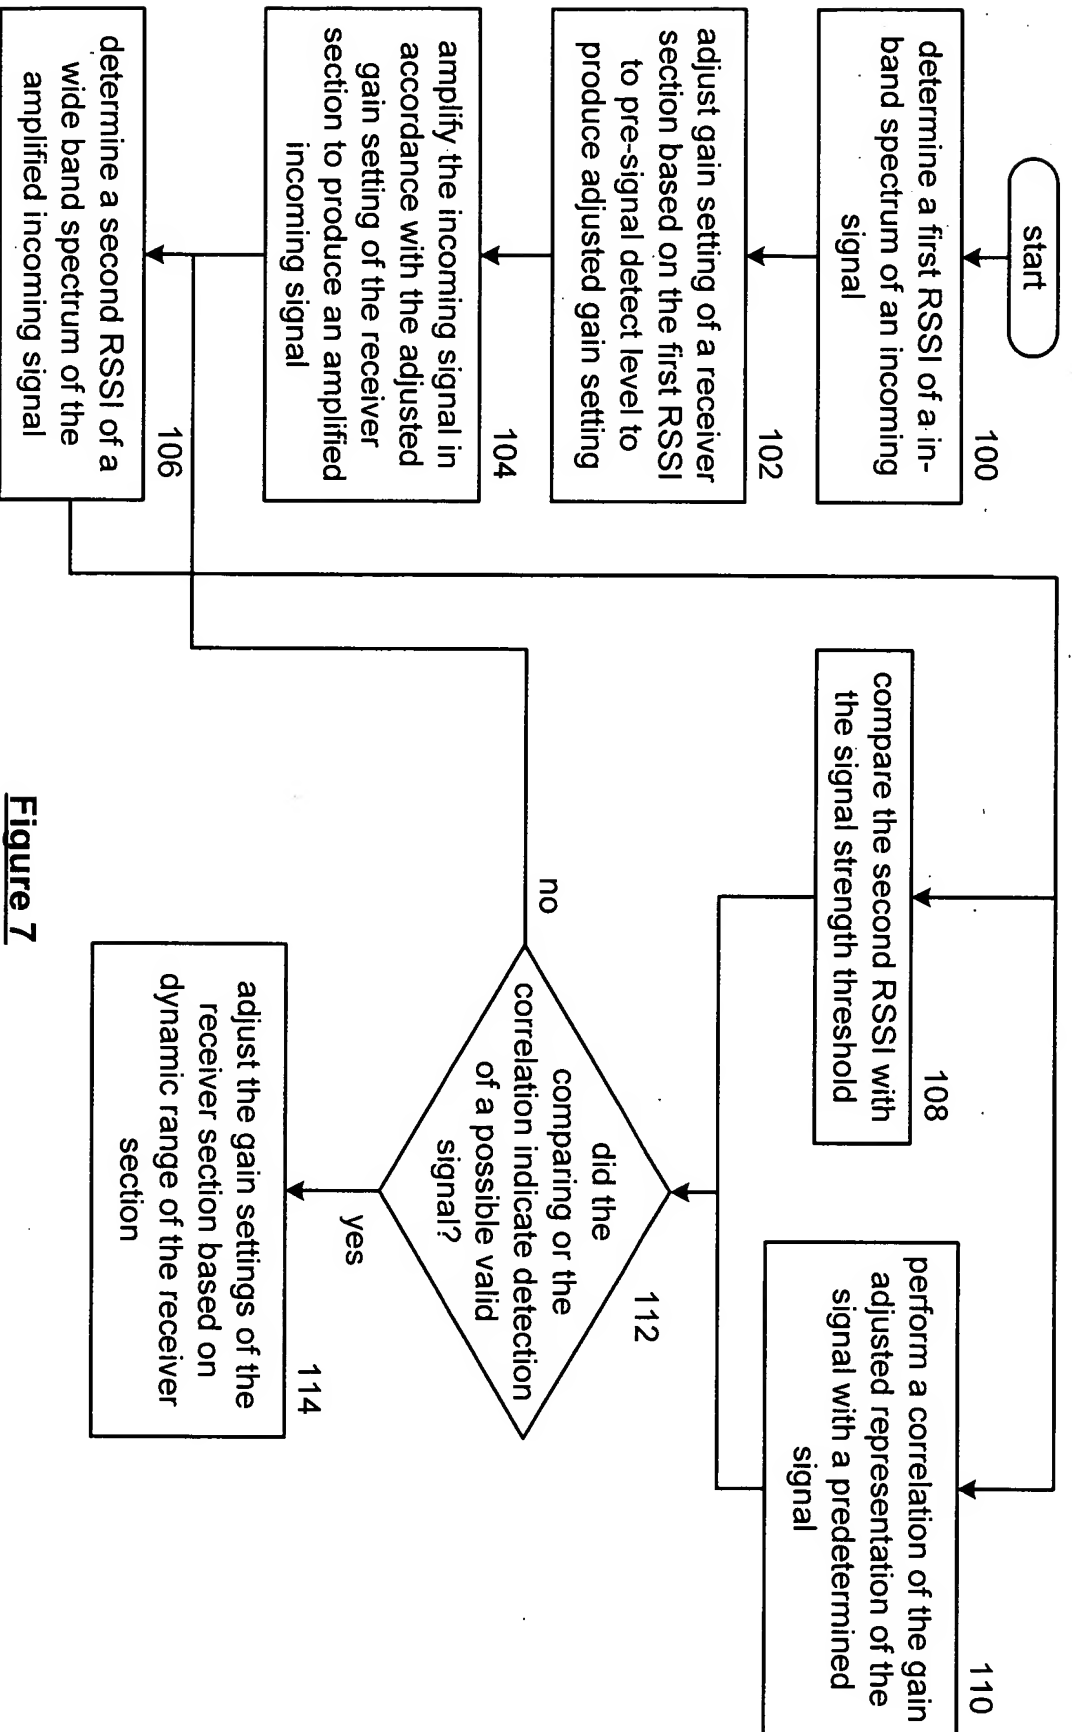


Figure 7